

# Accounting for well-to-wake carbon dioxide equivalent emissions in maritime transportation climate policies

---

Prepared by **Bryan Comer, PhD, and Liudmila Osipova, PhD**

## INTRODUCTION

This briefing paper explains how policymakers can account for well-to-wake (WTW) carbon dioxide equivalent (CO<sub>2</sub>e) emissions in strategies that aim to monitor or regulate climate-warming pollutants from ships. Well-to-wake emissions, or life-cycle emissions, are the sum of upstream (well-to-tank) and downstream (tank-to-wake) emissions. In addition to carbon dioxide (CO<sub>2</sub>), carbon dioxide equivalents include greenhouse gases (GHGs) such as methane (CH<sub>4</sub>) and nitrous oxide (N<sub>2</sub>O), as well as particles like black carbon (BC). By focusing solely on CO<sub>2</sub> and ignoring other pollutants, regulators would significantly underestimate climate pollution from maritime transport which would work against achieving the Paris Agreement goal to limit global warming to 1.5°C compared to pre-industrial levels.

The European Union (EU) intends to add maritime shipping emissions to its Emissions Trading Scheme (ETS) and is currently deciding if only CO<sub>2</sub> emissions will be covered or if other climate pollutants, including CH<sub>4</sub>, BC, and N<sub>2</sub>O, should also be considered to account for CO<sub>2</sub>-equivalent emissions. The emission factors presented in this briefing can be used by the EU and other regulatory bodies to calculate well-to-wake CO<sub>2</sub>e emissions from marine fuel consumption.

[www.theicct.org](http://www.theicct.org)

[communications@theicct.org](mailto:communications@theicct.org)

[twitter @theicct](https://twitter.com/theicct)

## APPROACH FOR CALCULATING WELL-TO-WAKE EMISSIONS BASED ON FUEL CONSUMPTION

Well-to-wake CO<sub>2</sub>e emissions (CO<sub>2</sub>e<sub>WTW</sub>) account for the amount of climate pollutants emitted upstream well-to-tank (WTT) and downstream tank-to-wake (TTW). This briefing reports CO<sub>2</sub>e<sub>WTW</sub> based on both 100-year and 20-year global warming potentials. As upstream and downstream pollutants vary according to the type of fuel and engines that are used, the analysis determines the emissions factors for four different marine fuels and multiple engine types. Fuels include heavy fuel oil (HFO), very-low sulfur fuel oil (VLSFO), marine gas oil (MGO), and liquefied natural gas (LNG). Engine types include slow speed diesel (SSD); medium speed diesel (MSD); two-stroke, slow-speed, Otto-cycle, dual fuel LNG (LNG-Otto-SS); four-stroke, medium-speed, Otto-cycle, dual fuel LNG (LNG-Otto MS); lean-burn spark ignition LNG (LBSI); two-stroke, slow-speed, Diesel-cycle LNG (LNG-Diesel), and steam turbines.

The global warming potentials listed in Table 1 represent the relative amount of heat each pollutant traps compared with the heat trapped by the same amount of CO<sub>2</sub> over a given period after emission.

**Table 1.** Global warming potentials for climate pollutants.

Pollutant	100-year	20-year	Source
CO <sub>2</sub>	1	1	Reference level
CH <sub>4</sub>	36	87	IPCC AR5 Table 8.7, with climate-carbon feedbacks, +1 to GWP20 and +2 for GWP100 for fossil methane, per footnote in Table 8.7
N <sub>2</sub> O	298	268	IPCC AR5 Table 8.7, with climate-carbon feedbacks
BC	900	3200	Bond et al. and Comer et al.

As shown in Table 1, CO<sub>2</sub> is used as the reference and has a global warming potential equal to one. For CH<sub>4</sub> and N<sub>2</sub>O, values were obtained from the Intergovernmental Panel on Climate Change (IPCC) Fifth Assessment Report (AR5).<sup>1</sup> For BC, values were obtained from Bond et al.<sup>2</sup> and Comer, Olmer, Mao, Roy, and Rutherford.<sup>3</sup>

A ship's CO<sub>2</sub>e<sub>WTW</sub> can be calculated based on the mass of fuel the ship consumed and a well-to-wake carbon dioxide equivalent factor (CEF<sub>WTW</sub>) for that fuel, as shown in Equation 1. Although the equation determines grams of CO<sub>2</sub>e, the same equation can be used with any other unit of mass. For example, if one gram of heavy fuel oil results in 4.5 grams of CO<sub>2</sub>e<sub>WTW</sub>, one tonne will emit 4.5 tonnes of CO<sub>2</sub>e<sub>WTW</sub>. For the EU ETS and other policies based on the fuel consumption of large ships, tonnes will be a more appropriate unit.

1 Rajendra K. Pachauri and Leo A. Meyer, *Climate Change 2014: Synthesis Report (Contribution of Working Groups I, II and III to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change (IPCC: Geneva, Switzerland, 2014)*, <https://www.ipcc.ch/report/ar5/syr/>.

2 Bond, T. C., et al., Bounding the role of black carbon in the climate system: A scientific assessment, *J. Geophys. Res. Atmos.*, 118 (2013) 5380– 5552, <https://doi.org/10.1002/jgrd.50171>.

3 Bryan Comer, Naya Olmer, Xiaoli Mao, Biswajoy Roy, and Dan Rutherford, *Black carbon emissions and fuel use in global shipping, 2015*, (ICCT: Washington, DC, 2017), <https://theicct.org/publications/black-carbon-emissions-global-shipping-2015>.

## Equation 1

$$CO_2e_{WTW} = FC \times CEF_{WTW}$$

$CO_2e_{WTW}$  = well-to-wake emissions, in  $gCO_2e$

$FC$  = fuel consumption, in g

$CEF_{WTW}$  = well-to-wake carbon dioxide equivalent factor for that fuel, in  $gCO_2e/g$  fuel

Fuel consumption is reported by ship owners or operators. In the case of the EU ETS, fuel consumption will be based on EU Monitoring Reporting and Verification data. The  $CEF_{WTW}$  is calculated based on WTT emissions associated with extracting, processing, and transporting the fuel and TTW emissions associated with using the fuel on board the ship. The TTW emissions include combustion and non-combustion emissions, such as methane slip from marine engines that use LNG. Equation 2 shows that  $CEF_{WTW}$  is the sum of the WTT and TTW carbon dioxide equivalent factors, labeled  $CEF_{WTT}$  and  $CEF_{TTW}$ , respectively.

## Equation 2

$$CEF_{WTW} = CEF_{WTT} + CEF_{TTW}$$

$CEF_{WTW}$  = well-to-wake carbon dioxide equivalent factor, in  $gCO_2e/g$  fuel

$CEF_{WTT}$  = well-to-tank carbon dioxide equivalent factor, in  $gCO_2e/g$  fuel

$CEF_{TTW}$  = tank-to-wake carbon dioxide equivalent factor, in  $gCO_2e/g$  fuel

As shown in Equation 3,  $CEF_{WTT}$  is calculated based on the emission factors for each climate pollutant ( $EF_{WTT_p}$ ) and the associated 100-year or 20-year global warming potential for each pollutant ( $GWP_p$ ). The  $CEF_{TTW}$  is calculated in the same manner, per Equation 4.

## Equation 3

$$CEF_{WTT} = \sum (EF_{WTT_p} \times GWP_p)$$

$CEF_{WTT}$  = well-to-tank carbon dioxide equivalent factor, in  $gCO_2e/g$  fuel

$EF_{WTT_p}$  = well-to-tank emission factor of pollutant  $p$ , in  $g/g$  fuel

$GWP_p$  = the 100-year or 20-year GWP of pollutant  $p$ ,

## Equation 4

$$CEF_{TTW} = \sum (EF_{TTW_p} \times GWP_p)$$

$CEF_{TTW}$  = tank-to-wake carbon dioxide equivalent factor, in  $gCO_2e/g$  fuel

$EF_{TTW_p}$  = tank-to-wake emission factor of pollutant  $p$ , in  $g/g$  fuel

$GWP_p$  = the 100-year or 20-year GWP of pollutant  $p$

The  $EF_{WTT}$  and  $EF_{TTW}$  include  $CO_2$ ,  $CH_4$ ,  $N_2O$ , and BC. Table 2 shows  $EF_{WTT}$  by fuel type and engine type for each pollutant, as well as  $CEF_{WTT}$ , calculated in accordance with Equation 3 and the 100-year or 20-year global warming potentials listed in Table 1.

(Note that WTT BC emission factors have not yet been established but could be added in the future.) Table 3 shows  $EF_{TTW}$  for each pollutant by fuel type and engine type, as well as  $CEF_{TTW}$ , calculated in accordance with Equation 4 and the GWPs in Table 1. Summing them together, Table 4 shows well-to-wake emission factors for each pollutant and  $CEF_{WTT}$ . The following two sub-sections explain in detail how we determined  $EF_{WTT}$  and  $EF_{TTW}$ .

**Table 2.** Well-to-tank emission factors for each pollutant ( $EF_{WTT}$ ) and associated carbon dioxide equivalent factors ( $CEF_{WTT}$ ).

Fuel type <sup>a</sup>	Engine type	Well-to-tank (g/g fuel)					
		$EF_{WTT}$				$CEF_{WTT}$	
		CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	BC	CO <sub>2</sub> e100	CO <sub>2</sub> e20
HFO	SSD	0.4311	0.00399	0.00001	Unknown <sup>a</sup>	0.577	0.780
	MSD	0.4311	0.00399	0.00001		0.577	0.780
VLSFO	SSD	0.5457	0.00448	0.00001		0.710	0.938
	MSD	0.5457	0.00448	0.00001		0.710	0.938
MGO	SSD	0.5757	0.00460	0.00001		0.744	0.979
	MSD	0.5757	0.00460	0.00001		0.744	0.979
LNG	LNG-Otto-MS	0.5300	0.01810	0.00001		1.184	2.107
	LNG-Otto-MS + crankcase	0.5300	0.01810	0.00001		1.184	2.107
	LNG-Otto-SS	0.5300	0.01810	0.00001		1.184	2.107
	LNG-Otto-SS + crankcase	0.5300	0.01810	0.00001		1.184	2.107
	LNG-Diesel	0.5300	0.01810	0.00001	1.184	2.107	
	LBSI	0.5300	0.01810	0.00001	1.184	2.107	
	LBSI + crankcase	0.5300	0.01810	0.00001	1.184	2.107	
	Steam Turbine	0.5300	0.01810	0.00001	1.184	2.107	

<sup>a</sup> WTT emission factors for black carbon are yet to be established but could be added later. If so, CO<sub>2</sub>e100 and CO<sub>2</sub>e20 values will increase based on the BC emission factor and global warming potential.

**Table 3.** Tank-to-wake emission factors for each pollutant ( $EF_{TTW}$ ) and associated carbon dioxide equivalent factors ( $CEF_{TTW}$ ).

Fuel type	Engine type	Tank-to-wake (g/g fuel)					
		$EF_{TTW}$				$CEF_{TTW}$	
		CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	BC	CO <sub>2</sub> e100	CO <sub>2</sub> e20
HFO	SSD	3.114	0.00006	0.00017	0.00019	3.338	3.773
	MSD	3.114	0.00005	0.00016	0.00049	3.605	4.730
VLSFO	SSD	3.188	0.00006	0.00018	0.00019	3.415	3.849
	MSD	3.188	0.00006	0.00017	0.00049	3.682	4.806
MGO	SSD	3.206	0.00006	0.00018	0.00004	3.298	3.388
	MSD	3.206	0.00006	0.00017	0.00026	3.493	4.089
LNG	LNG-Otto-MS	2.750	0.03526	0.00013	0.00002	4.075	5.916
	LNG-Otto-MS + crankcase	2.750	0.04167	0.00013	0.00002	4.306	6.473
	LNG-Otto-SS	2.750	0.01689	0.00014	0.00002	3.416	4.320
	LNG-Otto-SS + crankcase	2.750	0.02365	0.00014	0.00002	3.660	4.908
	LNG-Diesel	2.750	0.00148	0.00022	0.00001	2.879	2.970
	LBSI	2.750	0.02628	0.00013	0.00002	3.752	5.135
	LBSI + crankcase	2.750	0.03269	0.00013	0.00002	3.983	5.693
	Steam Turbine	2.750	0.00014	0.00007	0.00002	2.794	2.845

**Table 4.** Well-to-wake emission factors for each pollutant ( $EF_{WTW}$ ) and associated carbon dioxide equivalent factors ( $CEF_{WTW}$ ).

Fuel type	Engine type	Well-to-wake (g/g fuel)					
		$EF_{WTW}$				$CEF_{WTW}$	
		CO <sub>2</sub>	CH <sub>4</sub>	N <sub>2</sub> O	BC	CO <sub>2</sub> e100	CO <sub>2</sub> e20
HFO	SSD	3.545	0.00404	0.00018	0.00019	3.915	4.553
	MSD	3.545	0.00404	0.00017	0.00049	4.182	5.510
VLSFO	SSD	3.734	0.00453	0.00019	0.00019	4.124	4.787
	MSD	3.734	0.00453	0.00018	0.00049	4.391	5.744
MGO	SSD	3.782	0.00466	0.00019	0.00004	4.043	4.367
	MSD	3.782	0.00466	0.00018	0.00026	4.237	5.068
LNG	LNG-Otto-MS	3.280	0.05336	0.00014	0.00002	5.259	8.023
	LNG-Otto-MS + crankcase	3.280	0.05977	0.00014	0.00002	5.490	8.580
	LNG-Otto-SS	3.280	0.03499	0.00014	0.00002	4.600	6.427
	LNG-Otto-SS + crankcase	3.280	0.04175	0.00014	0.00002	4.844	7.015
	LNG-Diesel	3.280	0.01958	0.00023	0.00001	4.063	5.077
	LBSI	3.280	0.04438	0.00014	0.00002	4.936	7.242
	LBSI + crankcase	3.280	0.05079	0.00014	0.00002	5.167	7.799
	Steam Turbine	3.280	0.01824	0.00008	0.00002	3.978	4.952

## DETERMINING WELL-TO-TANK EMISSION FACTORS FOR EACH POLLUTANT

The WTT emission factors in Table 2 are obtained by multiplying the upstream energy-based emission factors for marine fuels in in Table 5 (g pollutant/megajoule) by the fuel energy content assumption in Table 6 (MJ/g fuel). The energy content assumptions for HFO, MGO, and LNG are consistent with the Fourth IMO GHG Study.<sup>4</sup> Assumptions for VLSFO, which was not assessed in the Fourth IMO GHG Study, are taken from a previous analysis.<sup>5</sup> The upstream CH<sub>4</sub> emissions for liquified natural gas in Table 5 (0.38 gCH<sub>4</sub>/MJ) are consistent with the findings in a previous study which finds that upstream methane leakage from liquefied natural gas production is higher than the 0.30 gCH<sub>4</sub>/MJ assumed by the U.S. Environmental Protection Agency.<sup>6</sup>

**Table 5.** Well-to-tank emissions for marine fuels (g/MJ)

Pollutant	Fuel			
	HFO	VLSFO	MGO	LNG
CH <sub>4</sub>	0.10	0.11	0.11	0.38
N <sub>2</sub> O	0.00018	0.00022	0.00023	0.00016
CO <sub>2</sub>	10.72	12.93	13.48	11.04

**Table 6.** Energy content of marine fuels

Fuel	Energy content (MJ/g fuel)
HFO	0.0402
MGO	0.0427
VLSFO	0.0422
LNG	0.0480

## DETERMINING TANK-TO-WAKE EMISSION FACTORS FOR EACH POLLUTANT

The TTW emission factors for each pollutant are shown in Table 3, and CO<sub>2</sub> is consistent with the carbon dioxide factors used in the Fourth IMO GHG Study<sup>7</sup> for HFO, MGO, and LNG and Comer et al.<sup>8</sup> for VLSFO, as shown in Table 7.

**Table 7.** Carbon factors for marine fuels.

Fuel	Carbon factor (gCO <sub>2</sub> /g fuel)
HFO	3.114
MGO	3.206
VLSFO	3.188
LNG	2.750

4 Jasper Faber, Shinichi Hanayama, Shuang Zhang, Paula Pereda, Bryan Comer, Elena Hauerhof,, and Hui Xing “Fourth IMO greenhouse gas study,” (International Maritime Organization, 2020), <https://docs.imo.org/>.

5 Bryan Comer, Elise Georgeff, and Liudmila Osipova, *Air emissions and water pollution discharges from ships with scrubbers*, ICCT: Washington, DC, 2020), <https://theicct.org/publications/air-water-pollution-scrubbers-2020>.

6 Nikita Pavlenko, Bryan Comer, Yuanrong Zhou, Nigel Clark, and Dan Rutherford, *The climate implications of using LNG as a marine fuel*, (ICCT: Washington, DC, 2020) <https://theicct.org/publications/climate-impacts-LNG-marine-fuel-2020>.

7 Faber et al., “Fourth IMO greenhouse gas study.”

8 Comer, Georgeff, and Osipova, *Air emissions and water pollution discharges from ships with scrubbers*.

Black carbon TTW emission factors are consistent with those used in the Faber et al.<sup>9</sup> and Comer et al.<sup>10</sup> We assume that the BC emission factors for VLSFO are the same as for HFO. Black carbon emission factors are a function of fuel type, engine type, and engine load. The BC TTW emission factors for HFO, VLSFO, and MGO in Table 3 assume that ships operate at 50% load, corresponding to the gray shaded row in Table 8, and are divided by 1000 to convert from units of gBC/kg fuel to gBC/g fuel. Emission factors for LNG are the same as those in Faber et al. and Comer et al., as shown in Table 9.<sup>11</sup>

**Table 8.** Black carbon emission factors for oil-based fuels (g/kg fuel)

Engine load	HFO or VLSFO		MGO	
	SSD	MSD	SSD	MSD
0.05	0.44	4.54	0.10	3.48
0.1	0.34	2.32	0.08	1.60
0.2	0.27	1.19	0.06	0.73
0.25	0.25	0.96	0.05	0.57
0.3	0.23	0.80	0.05	0.46
0.4	0.21	0.61	0.04	0.34
0.5	0.19	0.49	0.04	0.26
0.6	0.18	0.41	0.04	0.21
0.7	0.17	0.35	0.04	0.18
0.75	0.17	0.33	0.03	0.17
0.8	0.16	0.31	0.03	0.15
0.9	0.16	0.28	0.03	0.14
1	0.15	0.25	0.03	0.12

**Table 9.** Black carbon emission factors for LNG (g/kg fuel)

Engine type	BC (g/kg LNG)
LNG-Otto-MS, LNG-Otto-SS, LBSI	0.02
LNG-Diesel	0.01
Steam Turbine	0.02

Methane TTW emission factors are consistent with those use in the Fourth IMO GHG Study.<sup>12</sup> To calculate CH<sub>4</sub> TTW emissions factors, we divide the CH<sub>4</sub> energy-based emission factors used in Faber et al.,<sup>13</sup> which can be found in Table 10 and are in units of gCH<sub>4</sub>/kWh, by the specific fuel consumption (SFC) of each fuel-engine pair in Table 11, which are in units of g fuel/kWh. This results in TTW CH<sub>4</sub> emission factors in units of gCH<sub>4</sub>/g fuel. The SFC assumptions reflect 2001 and newer model year engines and are

9 Faber et al., “Fourth IMO greenhouse gas study.”

10 Bryan Comer, Naya Olmer, Xiaoli Mao, Biswajoy Roy, and Dan Rutherford, *Black carbon emissions and fuel use in global shipping, 2015*. (ICCT: Washington, DC, 2017) <https://theicct.org/publications/black-carbon-emissions-global-shipping-2015>.

11 Faber et al., “Fourth IMO greenhouse gas study;” Comer, Georgeff, and Osipova, *Air emissions and water pollution discharges from ships with scrubbers*.

12 Faber et al., “Fourth IMO greenhouse gas study.”

13 Faber et al., “Fourth IMO greenhouse gas study.”

taken from the Fourth IMO GHG Study.<sup>14</sup> The Fourth IMO GHG Study’s LNG engine SFC assumptions are consistent with Pavlenko et al., which reflects modern LNG engines built in the last several years.<sup>15</sup> We assume that ships using VLSFO emit the same amount of CH<sub>4</sub> as those using HFO. Some ships using low-pressure injection engines, including LNG-Otto and LBSI may have open crankcases; if so, Pavlenko et al. estimate that there could be an additional 1 gCH<sub>4</sub>/kWh escaping unburned from the crankcase.<sup>16</sup> Therefore, in Table 3, we include rows that show the impact on CH<sub>4</sub> and CO<sub>2</sub>e from these additional crankcase emissions for LNG-Otto and LBSI engines in Table 10.

**Table 10.** Methane emission factors (g/kWh)

Engine type	Fuel type	Methane (g/kWh)
<b>SSD or MSD</b>	HFO, VLSFO, MGO	0.01
<b>LNG-Otto-MS</b>	LNG	5.5 <sup>a</sup>
<b>LNG-Otto-SS</b>	LNG	2.5 <sup>a</sup>
<b>LNG-Diesel</b>	LNG	0.2
<b>LBSI</b>	LNG	4.1 <sup>a</sup>
<b>Steam Turbine</b>	HFO, VLSFO, MGO	0.002
	LNG	0.04

<sup>a</sup> This table shows methane emission factors used in the Fourth IMO GHG Study; however, low-pressure injection engines, such as LNG-Otto-MS, LNG-Otto-SS, and LBSI, may have open crankcases, which could emit an additional 1.0 gCH<sub>4</sub>/kWh.

**Table 11.** Specific fuel consumption (g/kWh) for marine engines.

Fuel type	Engine type	Specific fuel consumption (g fuel/kWh)
<b>HFO</b>	SSD	175
	MSD	185
<b>VLSFO</b>	SSD	167
	MSD	177
<b>MGO</b>	SSD	165
	MSD	175
<b>LNG</b>	LNG-Otto-MS	156
	LNG-Otto-SS	148
	LNG-Diesel	135
	LBSI	156
	Steam Turbine	285

Nitrous oxide TTW emission factors are consistent with those use in the Fourth IMO GHG Study.<sup>17</sup> To calculate N<sub>2</sub>O TTW emissions factors, we divide the N<sub>2</sub>O energy-based emission factors used in Faber et al.,<sup>18</sup> which can be found in Table 12 and are in units of gN<sub>2</sub>O/kWh, by the SFC of each fuel-engine pair in Table 11, which are in units of g fuel/

<sup>14</sup> Faber et al., “Fourth IMO greenhouse gas study.”

<sup>15</sup> Pavlenko et al., *The climate implications of using LNG as a marine fuel*.

<sup>16</sup> Pavlenko, et al., *The climate implications of using LNG as a marine fuel*.

<sup>17</sup> Faber et al., “Fourth IMO greenhouse gas study.”

<sup>18</sup> Faber et al., “Fourth IMO greenhouse gas study.”



kWh. This results in TTW N<sub>2</sub>O emission factors in units of gN<sub>2</sub>O/g fuel. We assume that ships using VLSFO emit the same amount of N<sub>2</sub>O as those using HFO.

**Table 12.** Nitrous oxide emission factors (g/kWh)

Engine	Fuel	N <sub>2</sub> O (g/kWh)
SSD or MSD	HFO, VLSFO, MGO	0.03
Steam Turbine	HFO, VLSFO, MGO	0.04
LNG-Otto-MS, LNG-Otto-SS, LBSI	LNG	0.02
LNG-Diesel	LNG	0.03
Steam Turbine	LNG	0.02

## RESULTS

Table 13 presents WTW emission factors for fossil marine fuels developed according to the methodology described in this briefing. These WTW emission factors include both upstream well-to-tank (WTT) and downstream tank-to-wake (TTW) emission factors.


In Table 13, CO<sub>2</sub> accounts for only carbon dioxide emissions, whereas CO<sub>2</sub>e100 and CO<sub>2</sub>e20 account for emissions of other climate pollutants based on their 100-year or 20-year global warming potential. Comparing the three metrics, one can see that focusing solely on CO<sub>2</sub> and ignoring other climate pollutants can significantly underestimate climate pollution from maritime transport. We suggest policymakers consider not only CO<sub>2</sub>e100 but also CO<sub>2</sub>e20 for policies intended to be aligned with the Paris Agreement. In addition to reducing CO<sub>2</sub> emissions, reducing pollutants with large 20-year global warming potential, such as CH<sub>4</sub>, BC, and N<sub>2</sub>O, can help prevent additional near-term warming.

**Table 13.** Well-to-wake carbon dioxide and carbon dioxide equivalent factors (CEF<sub>WTW</sub>) for fossil marine fuels.

Fuel type	Engine type	Well-to-wake (g/g fuel)		
		CO <sub>2</sub>	CO <sub>2</sub> e100	CO <sub>2</sub> e20
HFO	SSD	3.545	3.915	4.553
	MSD	3.545	4.182	5.510
VLSFO	SSD	3.734	4.124	4.787
	MSD	3.734	4.391	5.744
MGO	SSD	3.782	4.043	4.367
	MSD	3.782	4.237	5.068
LNG	LNG-Otto-MS	3.280	5.259	8.023
	LNG-Otto-MS + crankcase	3.280	5.490	8.580
	LNG-Otto-SS	3.280	4.600	6.427
	LNG-Otto-SS + crankcase	3.280	4.844	7.015
	LNG-Diesel	3.280	4.063	5.077
	LBSI	3.280	4.936	7.242
	LBSI + crankcase	3.280	5.167	7.799
	Steam Turbine	3.280	3.978	4.952

## DISCUSSION

To give an example of why it is important to consider not only CO<sub>2</sub> but also CO<sub>2</sub>e100 and CO<sub>2</sub>e20, consider the figures below. Each figure applies Equation 1, and fuel consumption (*FC*) is assumed to be 1000 tonnes. Figure 1 shows the CO<sub>2</sub>e<sub>WTW</sub> emissions of consuming 1,000 tonnes of LNG in the engine with the highest WTW emissions (LNG-Otto-MS + crankcase) and the LNG engine with the lowest WTW emissions (LNG-Diesel). The exercise is repeated for SSD and MSD engines running on VLSFO (Figure 2) and MGO (Figure 3). Notice that estimates of WTW climate pollution can more than double for LNG engines that have high methane slip when evaluated on CO<sub>2</sub>e20 compared with CO<sub>2</sub> (left side of Figure 1). Figure 2 and Figure 3 show that the relative contribution of black carbon emissions to WTW emissions depends strongly on whether it is evaluated using 100-year or 20-year global warming potential. When BC is accounted for, using MGO results in lower WTW emissions than VLSFO.

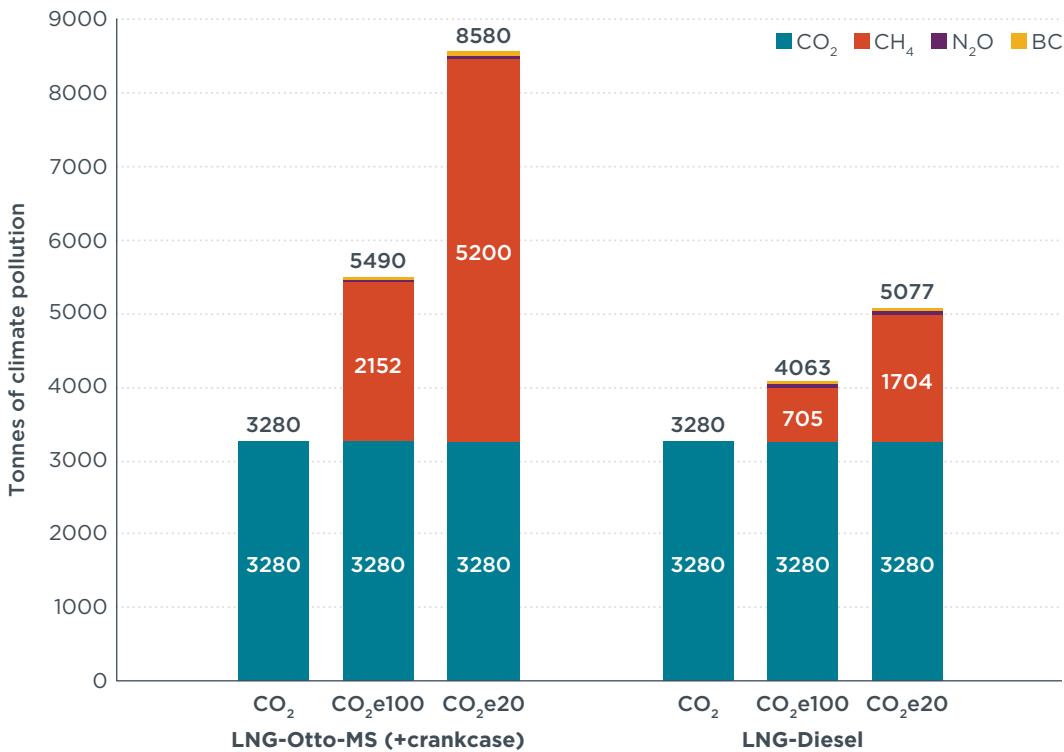

**Figure 1.** Well-to-wake emissions of consuming 1000 tonnes of liquefied natural gas in two engines.

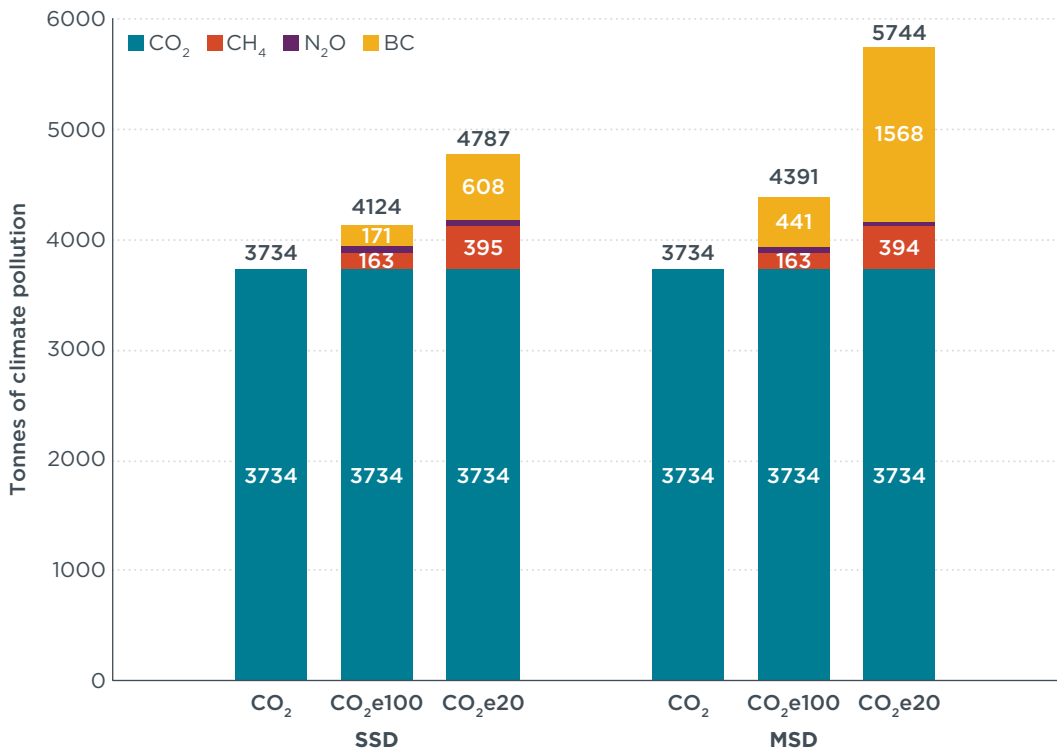


Figure 2. Well-to-wake emissions of consuming 1000 tonnes of VLSFO in two engines.

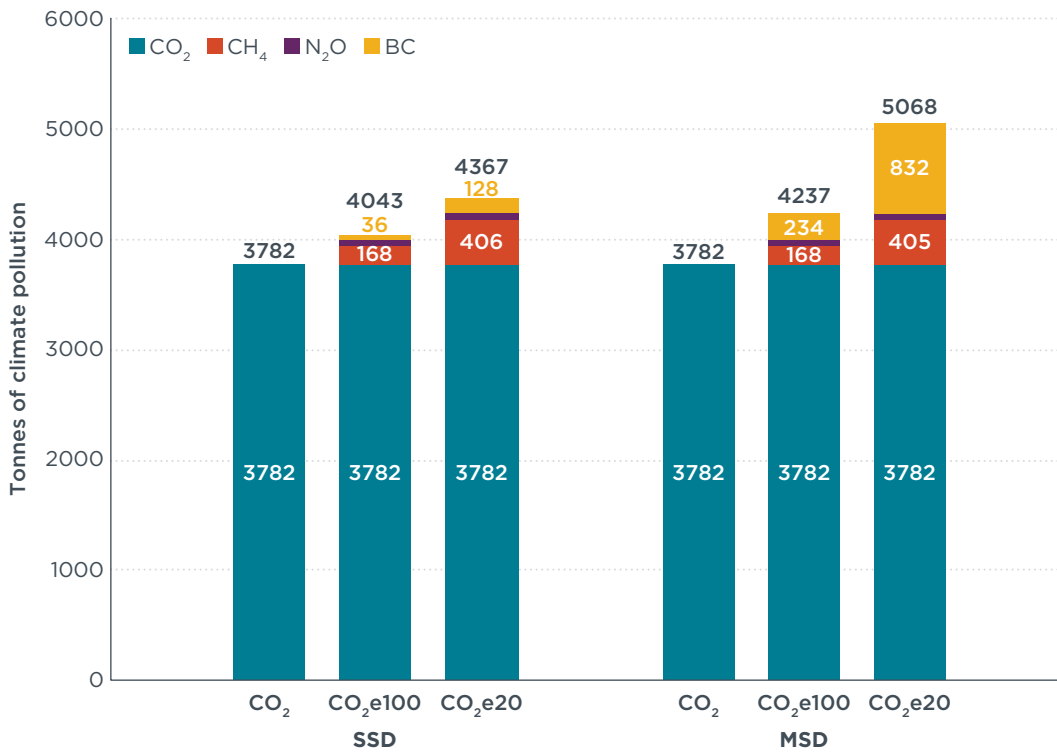


Figure 3. Well-to-wake emissions of consuming 1000 tonnes of MGO in two engines.

## CONCLUSIONS

This briefing paper outlines a methodology for calculating well-to-wake carbon dioxide equivalent emissions from four fossil marine fuels: heavy fuel oil, very low sulfur fuel oil, marine gas oil, and liquefied natural gas. Well-to-wake emission factors for these fuels are presented in Table 13. While the EU Emissions Trading Scheme presents the most immediate opportunity to apply this methodology, it can also be applied to policies being developed at the International Maritime Organization and in other regions and countries that aim to reduce shipping's climate impacts.

The WTW carbon dioxide equivalent factors developed in this briefing cover existing marine fuels but could be expanded to new fuels including hydrogen and ammonia, two fuels where the WTT component is particularly important when evaluating their life-cycle climate consequences. No matter which fuel is used, WTT emissions will depend on the feedstock and production pathway. In addition, the TTW emissions will depend on whether the fuel is used in a fuel cell, combusted in an engine, or used in some other way. As new fuels and energy sources for shipping are researched and developed, it will be important to develop WTW emission factors that encompass their full life-cycle emissions in order to accurately judge their climate credentials.